



TPLW 20000



TECHNICAL SPECIFICATIONS for the cannon:

Theoretical throw distance (without wind): 30-40 m

Rings of nozzles: N. 1

Number of nozzles: N. 33

Type nozzles: stainless steel

Nominal fan power: ~ 5,5 kW

Manual Angle of rotation: 340°

Manual Pitch angle adjustable from: -20° ÷ +45°

Hydraulic connection: 1 ½ gas M

Electrical connection: 400 V 50 Hz 3P+T 32 A

Protection rating: IP 55

Noise level: < 93 Lwa


Water filter with extractable cartridge

Water consumption (with 15 gph nozzles):

BAR	6	9	12	15
LITRES/MINUTES	20	24	28	31

Water pump: 2,2 kW

Pressure: Minimum 0,5 bar - maximum 35 bar

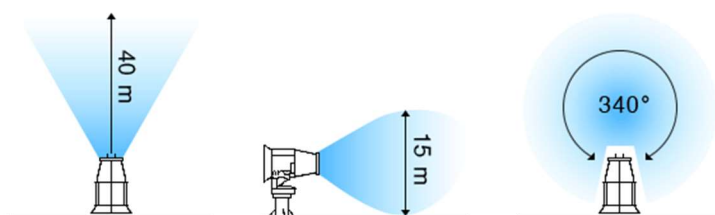

Trime Srl – Strada per Robecco snc, 20081 Cassinetta di Lugagnano, Milano. Italia

Tel. +39 02 942 1464 e-mail: info@trime.it web: www.trime.it

Codice Fiscale - Partita Iva 00541350187 – Trib. di Vigevano Reg. soc. 3146 – M.573297 C.C.I.A.A. di Milano 0995049



- **BUILT-IN GENERATING SET**
- Prime Power kVA 20
- Engine Yanmar 4TNV88
- Fuel tank lt 40
- Specific fuel consumption lt/h 3,5
- Average running time hours 212

- **Dimensions skid base (mm):**
- 2300mm L / 1500mm W

- **Dry Weight**
- 1200Kg

- **1000lt plastic tank included**

- **All fitted on skid base as per herewith attached pic.**